

Lista Storage Wall® Systems



At Panoz Motor Sports, Lista's shallow depth Storage Wall Systems allow maximum storage capacity and full access, together with space-saving narrow aisles.

STORE LARGE AND SMALL ITEMS TOGETHER IN A LOGICAL, EASILY ACCESSIBLE SYSTEM

List Storage Wall® Systems

Features	68
Building a Storage Wall System	70
How to Order a Storage Wall System	71
Full Depth System Components	72
Vertical Side Frames	72
End, Universal, Rear Panels	72
Sway Braces	72
Roll-Out Trays	73
Shelves and Accessories	73
Shallow Depth System Components	74
Vertical Side Frames	74
End, Universal, Rear Panels	74
Sway Braces	74
Roll-Out Trays	75
Shelves and Accessories	75
Locking Systems	76
Bookcases, Counter Tops and Ladders	77
Doors	78
Wide-Span Beam System	79
Roller Shelves	80



Lista Storage Wall® Systems Make Any Workspace Work

For the optimum use of space, Lista Storage Wall Systems have it all:

- drawers to store small parts and components
- roll-out trays for easy access to large, heavy items
- shelves to handle larger items
- wide-span beams for storing very large items that span multiple Storage Wall sections
- doors for additional security and finished appearance

A cost-effective solution

The combination of these modular components means you can store small and large parts together and have easy access to both.

It also means your Lista Storage Wall System can easily accommodate changes and additions and never be outdated – a cost-effective solution for now and in the future.

Custom designed and arranged for your individual needs, no other single storage system can match it.

Capacity

In addition to full use of available ceiling height, the Lista Storage Wall System gives you maximum weight and cubic volume capacity. The all-steel construction makes it ideal for supporting a mezzanine.

Full and shallow depth

Lista offers two different Storage Wall Systems, as shown in the footprints to the right.

The full depth Storage Wall System is the ideal solution for easily accessible storage of a variety of large and small items.

The shallow depth Storage Wall System excels where aisle and floor space is critical and vertical space can be utilized.



Storage Wall Footprints

Full Depth (page 72)



Standard Width Section
28 1/8" wide x 27 3/4" deep



Mid-Width Section
46 7/8" wide x 27 3/4" deep



Double Width Section
56 1/4" wide x 27 3/4" deep

Shallow Depth (page 74)



ST Width Section
28 1/8" wide x 21 3/4" deep



HS Width Section
40 5/32" wide x 21 3/4" deep

Viti Mercedes, an auto dealership, uses a Storage Wall® System with roll-out trays to house heavy brake rotors in its parts department. The trays have a 440 lb. capacity; heavy-duty roll-out trays featuring a 770 lb. capacity are also available.



Storage Wall sections featuring different combinations of shelves, drawers, roll-out trays and wide-span beams allow Hackensack University Medical Center to make the most of every inch of their available space.



The Storage Wall System enables the New York Daily News to store oversized items such as motors, gears and drive shafts on shelves, while keeping smaller items such as drill bits and hand tools in highly organized, adjacent modular drawers. Lockable sliding doors keep contents safe and secure.



The shallow depth Storage Wall System at Jensen Aircraft Leasing is a perfect match for the narrow mezzanine aisle on the second level of this aircraft hangar. Despite the limited space available, the Storage Wall System allows for the full use of the drawers' storage, with plenty of easily accessible storage space on the Storage Wall's shelves for large, bulky items.

Lista Storage Wall® Features

The Lista Storage Wall System

is wall-to-wall packed with unequalled features and benefits.

This unique System's extraordinary flexibility means you get the exact solution that your workspace and storage needs demand.

Feature: Six stackable heights

Storage Wall Systems come in six standard sizes up to 118 1/8" high. They can be arranged as multi-story installations with mezzanines.

Benefit: Maximum use of storage space by using available height

Feature: Track-guided safety ladder

Ladder folds flat when not in use so aisle is never blocked.

Benefit: Easy and safe access to upper levels

Feature: Adjustable drawers, roll-out trays and shelves

For your current or changing needs, drawers, roll-out trays and shelves can be combined in any sequence in any section and easily rearranged.

Benefit: Total flexibility

Feature: Roll-out trays

Full extension roll-out trays roll smoothly with their full 440 lb. or 770 lb. load capacities.

Benefit: Heavy items are easily accessible

Feature: Variety of locking systems

Individual sections can be locked for added, specific security.

Benefit: Your security requirements can be totally satisfied

Feature: 100% full extension drawers

Drawers ride smoothly to full extension on precision ball bearing suspension.

Benefit: Full use of all drawer space and easy access to farthest corner

Feature: Six different full sidewall height drawers

Sidewall and partition height are equal to usable drawer height.

Benefit: Full use of cubic volume with no wasted space

Feature: Label holders

Full length labeling strips show drawer contents at a glance.

Benefit: Faster retrieval and easier inventory control

Feature: Custom compartments

All drawers have partitioning slots on all four sides, and Lista offers a wide variety of partitioning accessories.

Benefit: Maximum organization and faster retrieval

SHALLOW DEPTH STORAGE WALL SYSTEM
21 3/4" DEEP



FULL DEPTH STORAGE WALL SYSTEM
27 3/4" DEEP



Building a Storage Wall® System

All Storage Wall Systems come in build-as-you-go units. Each starter section consists of a pair of matched height vertical side frames joined with appropriate width top and bottom universal panels. For lateral stability, rear panels or diagonal sway braces are fastened to the side frames. Rear and end panels can be used to enclose the

sections. To add a section, just order an additional vertical side frame and the appropriate universal panels for the section width you are adding. Sections can be added at any time in the future.


All components for both full and shallow depth Storage Wall Systems can be ordered separately from the charts on the following pages.

Design assistance

Our experienced technical support and design team is pleased to review your needs and assist you in solving any storage problem, free of charge.

Assembly

Listo Storage Wall Systems are shipped knocked down and come with a complete set of easy-to-follow assembly instructions. No special tools or equipment are necessary. Your Listo representative is always available for assistance or for additional technical support.

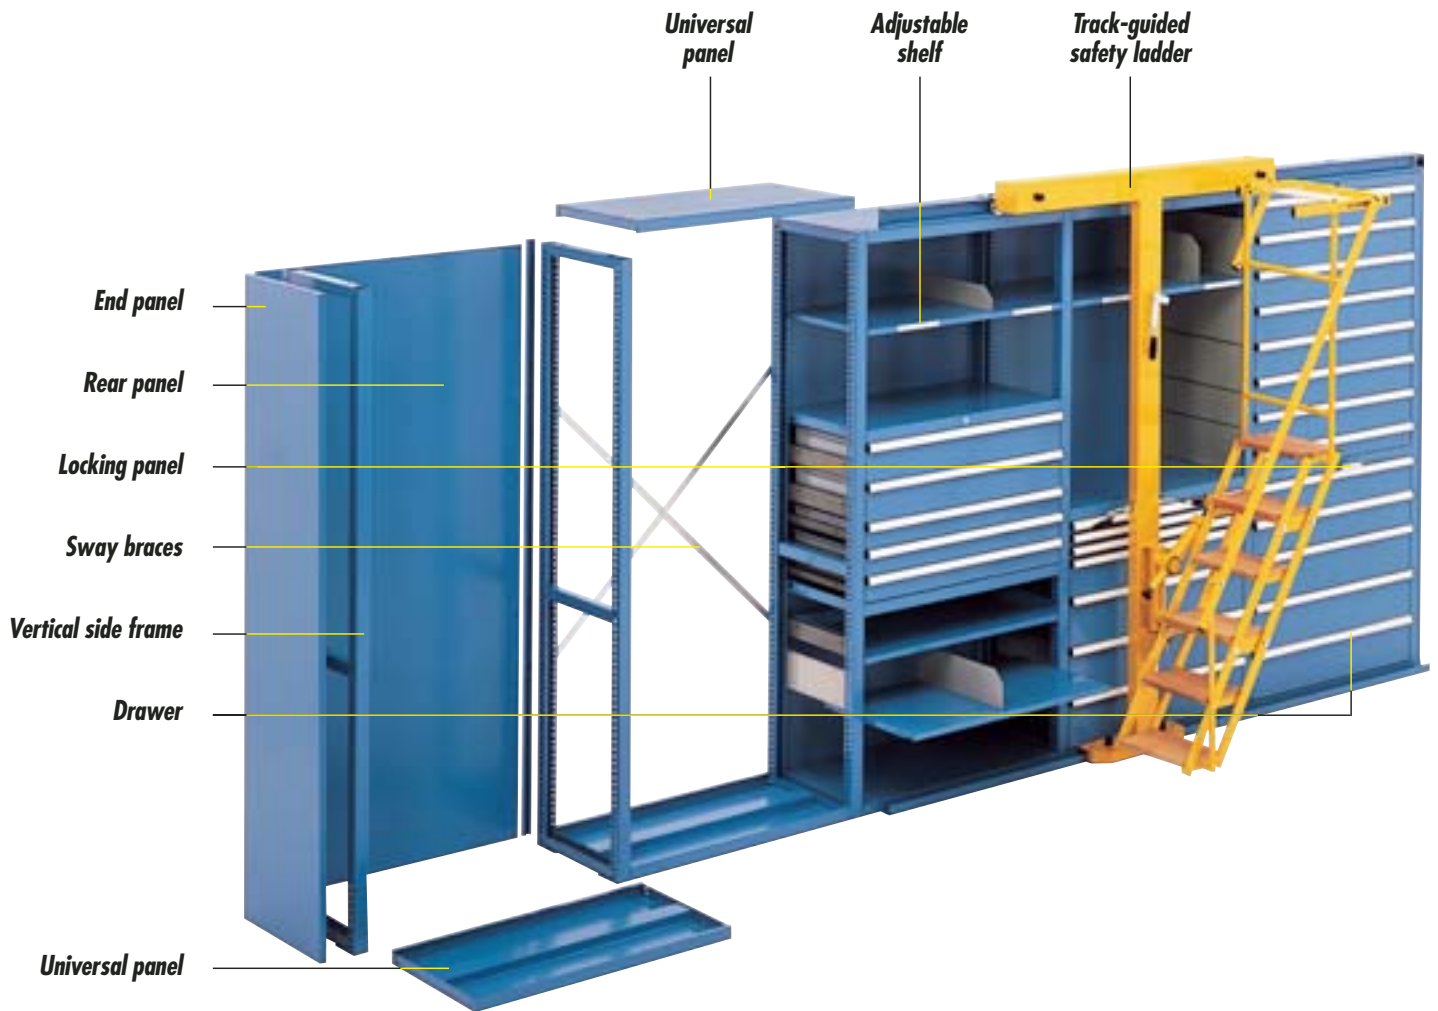

Full Depth Storage Wall® System (27 3/4" deep) – Frames, Panels and Sway Braces

Full depth Storage Wall sections (27 3/4" deep) come in three different widths. Panel/section widths correspond to Lista Standard, Mid- and Double Width components.

At any time, additional sections can be added, and drawers, roll-out trays, and shelves can be easily reconfigured to accommodate growth and/or changing needs.

Ordering

All basic components are ordered separately from the charts on these two pages. Be sure to match the width of the drawers, shelves, etc. to the section width you are building.

Please note that the final digits in the part numbers for universal panels, sway braces and rear panels indicate width in units:

- 36U for Standard Width
- 64U for Mid-Width
- 78U for Double Width

To order drawers for Storage Walls sections, please see the following pages:

- Standard Width drawers – pages 21 and 26-27
- Mid-Width drawers – pages 29 and 33
- Double Width drawers – pages 35 and 39

Vertical Side Frames

Heavy duty one-piece vertical uprights with welded horizontal struts. Vertical uprights are slotted at 1" increments for placement of drawers, roll-out trays or shelves. Color: to match unit.



PART NO.	OVERALL HT.	USABLE HT.
VSF1000	39 3/8"	35 7/16" (900mm)
VSF1450	57 1/8"	53 1/8" (1350mm)
VSF2000	78 3/4"	74 3/4" (1900mm)
VSF2200	86 5/8"	80 3/4" (2050mm)
VSF2500	98 7/16"	92 1/2" (2350mm)
VSF3000	118 1/8"	112 1/4" (2850mm)

Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2 3/32". If end panels are used, add 29/32" for each.

SECTION WIDTH	LENGTH BETWEEN SIDE FRAME CENTERS
standard (36 units)	28 1/8" (714mm)
mid-width (64 units)	46 7/8" (1190mm)
double width (78 units)	56 1/4" (1428mm)

End Panels

These optional steel sheet panels enclose the ends of the completed units. Hardware included. Color: to match unit.

PART NO.	HEIGHT
EP1000	39 3/8" (1000mm)
EP1450	57 1/8" (1450mm)
EP2000	78 3/4" (2000mm)
EP2200	86 5/8" (2200mm)
EP2500	98 7/16" (2500mm)
EP3000	118 1/8" (3000mm)



Universal Panels

Steel sheet universal panels measure 2" (50mm) in height and are fastened to the top and bottom of the vertical side frames to complete each section. Sections with vertical side frames 2200 or greater must have a third intermediate universal panel. Fasteners are included. Color: to match unit. For panels that accept the lock system, see page 76.

Universal Panels

PART NO.	WIDTH	LOAD CAPACITY
UP/36U	26" (661mm)	550 lbs. (250kg)
UP/64U	44 3/4" (1137mm)	550 lbs. (250kg)
UP/78U	54 1/8" (1375mm)	550 lbs. (250kg)

Universal Panels with Mounting Holes

For use with counter tops, tambour doors (top panel only) and double hinged doors (top and bottom panel).

PART NO.	WIDTH	LOAD CAPACITY
UP/36U-UM	26" (661mm)	550 lbs. (250kg)
UP/64U-UM	44 3/4" (1137mm)	550 lbs. (250kg)
UP/78U-UM	54 1/8" (1375mm)	550 lbs. (250kg)

Rear Panels

Panels are bolted to the vertical side frames to enclose the rear of each section and provide lateral stability. Rear panels must be fitted at least every fourth section. Fasteners included. Color: to match unit. Sway braces can be substituted.

PART NO.	HEIGHT
Standard Width 28 1/8" (714mm) – 36 units	
RP1000/36U	39 3/8" (1000mm)
RP1450/36U	57 1/8" (1450mm)
RP2000/36U	78 3/4" (2000mm)
RP2200/36U	86 5/8" (2200mm)
RP2500/36U	98 7/16" (2500mm)
RP3000/36U	118 1/8" (3000mm)

Mid-Width 46 7/8" (1190mm) – 64 units

RP1000/64U	39 3/8" (1000mm)
RP1450/64U	57 1/8" (1450mm)
RP2000/64U	78 3/4" (2000mm)
RP2200/64U	86 5/8" (2200mm)
RP2500/64U	98 7/16" (2500mm)
RP3000/64U	118 1/8" (3000mm)

Double Width 56 1/4" (1428mm) – 78 units

RP1000/78U	39 3/8" (1000mm)
RP1450/78U	57 1/8" (1450mm)
RP2000/78U	78 3/4" (2000mm)
RP2200/78U	86 5/8" (2200mm)
RP2500/78U	98 7/16" (2500mm)
RP3000/78U	118 1/8" (3000mm)

Sway Braces

Used for units without rear panels to provide the necessary lateral stability. Diagonal braces must be fitted at least every fourth section. Color: to match unit. Supplied in pairs with fasteners included.

PART NO.	WIDTH
SB36U	28 1/8" (714mm)
SB64U	46 7/8" (1190mm)
SB78U	56 1/4" (1428mm)



Roll-Out Trays

Roll-out trays can be mounted in any sequence or combination with drawers and shelves. Each tray uses the equivalent height of a 100 drawer (100mm high). Trays have full length handles, galvanized insert panels, and 1 3/4" rear and side retaining walls. Be sure to order trays to match the particular section width you are outfitting.

- Usable depth of tray is 24".
- Weight capacity is 440 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
SC-TCF	36U (standard)	24" (610mm)
MW-TCF	64U (mid-width)	42 13/16" (1088mm)
DW-TCF	78U (double width)	52 3/16" (1326mm)



Heavy Duty Roll-Out Tray

Trays have full length handles and galvanized insert panels. Each tray uses the equivalent height of a 225 drawer (225mm high). Be sure to order trays to match the particular section width you are outfitting. Use of individual drawer latch and retainer strip is required (see page 76).

- Usable depth of tray is 24".
- Weight capacity of Standard Width roll-out trays is 770 lbs. for evenly distributed loads.
- Weight capacity of Mid-Width and Double Width roll-out trays is 660 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
HDTCF/SC	36U (standard)	23" (584mm)
HDTCF/MW	64U (mid-width)	40 3/4" (1035mm)
HDTCF/DW	78U (double width)	50 1/4" (1276mm)



Adjustable Shelves

Steel shelves can easily be moved at any time and used in any combination or sequence with drawers and roll-out trays. Shelves are 1" (25mm) high. Shelf support clips are included. Color: to match unit. Be sure to order shelves to match the particular section width you are outfitting.

- Usable depth of shelf is 27 1/2".
- Shelves have a 440 lb. maximum load capacity for evenly-distributed loads.

PART NO.	SECTION	USABLE WIDTH
AS-P/36U	36U (standard)	26" (661mm)
AS-P/64U	64U (mid-width)	44 3/4" (1137mm)
AS-P/78U	78U (double width)	54 1/8" (1375mm)

Shelf Dividers

Steel sheet dividers (shown above) fit over lip of shelf. Color: to match shelves.

PART NO.	HEIGHT
SWSD100/36	4" (100mm)
SWSD150/36	6" (150mm)
SWSD200/36	8" (200mm)

Self-Adhesive Labels

Plastic labels for marking adjustable shelves.

PART NO.	LENGTH
X2785/1	3 7/8" (100mm)
X2785/2	5 7/8" (150mm)
X2785/3	7 7/8" (200mm)
X2785/4	11 3/4" (300mm)



Shelf End Panels

Steel sheet panel, 26" long, provides side wall for shelves. Color: to match unit. Inserted without additional hardware.

PART NO.	HEIGHT	MIN. SHELF SPACING
X684/3	5 15/16" (150mm)	7 7/8" (200mm)
X684/5	7 7/8" (200mm)	9 7/8" (250mm)
X684/7	9 7/8" (250mm)	11 3/4" (300mm)



Frame Top Fill-In Strip

Steel sheet strip, covers top of vertical side frames to create a smooth continuous surface. Not for use with sliding doors or vertical tambour doors. Color: to match unit.

PART NO.
X699



Intermediate Fill-In Strip

Steel sheet strip fills the space created by vertical side frames between shelves or universal panels to create a smooth continuous shelf surface. Must be used between 2 shelves or 2 universal panels. Color: to match unit. Retainer clip included.

PART NO.
X700

Shallow Depth Storage Wall® System (21 3/4" deep) – Frames, Panels and Sway Braces

Shallow depth Storage Wall sections (21 3/4" deep) come in two different widths. Panel/section widths correspond to Lista ST and HS Width components.

At any time, additional sections can be added, and drawers, roll-out trays, and shelves can be easily reconfigured to accommodate growth and/or changing needs.

Ordering

All basic components are ordered separately from the charts on these two pages. Be sure to match the width of the drawers, etc. to the section width you are building.

Please note that the final digits in the part numbers for universal panels, sway braces and rear panels indicate width in units:

- 36U for ST Width
- 54U for HS Width

To order drawers for Storage Walls sections, please see the following pages:

- ST Width drawers – pages 43 and 47
- HS Width drawers – pages 49 and 53

Vertical Side Frames

Heavy duty one-piece vertical uprights with welded horizontal struts. Vertical uprights are slotted at 1" increments for placement of drawers, roll-out trays or shelves. Color: to match unit.



PART NO.	OVERALL HEIGHT	USABLE HEIGHT
VSF1000/B255	39 3/8"	35 7/16" (900mm)
VSF1450/B255	57 1/8"	53 1/8" (1350mm)
VSF2000/B255	78 3/4"	74 3/4" (1900mm)
VSF2200/B255	86 5/8"	80 3/4" (2050mm)
VSF2500/B255	98 7/16"	92 1/2" (2350mm)
VSF3000/B255	118 1/8"	112 1/4" (2850mm)

Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2 3/32". If end panels are used, add 29/32" for each.

SECTION WIDTH	LENGTH BETWEEN SIDE FRAME CENTERS
ST (36 units)	28 1/8" (714mm)
HS (54 units)	40 3/32" (1020mm)

End Panels

These optional panels enclose the ends of the completed units. Hardware included. Color: to match unit.

PART NO.	HEIGHT
EP1000/B255	39 3/8" (1000mm)
EP1450/B255	57 1/8" (1450mm)
EP2000/B255	78 3/4" (2000mm)
EP2200/B255	86 5/8" (2200mm)
EP2500/B255	98 7/16" (2500mm)
EP3000/B255	118 1/8" (3000mm)



Universal Panels

Steel sheet universal panels measure 2" (50mm) in height and are fastened to the top and bottom of the vertical side frames to complete each section. Sections with vertical side frames 2200 or greater must have a third intermediate universal panel. Fasteners are included. Color: to match unit. For panels that accept the lock system, see page 76.

Universal Panels

PART NO.	WIDTH	LOAD CAPACITY
UP/3627U	26" (661mm)	550 lbs. (250kg)
UP/54U	38" (967mm)	550 lbs. (250kg)

Universal Panels with Mounting Holes

For use with counter tops, tambour doors (top panel only) and double hinged doors (top and bottom panel).

PART NO.	WIDTH	LOAD CAPACITY
UP/3627U-UM	26" (661mm)	550 lbs. (250kg)
UP/54U-UM	38" (967mm)	550 lbs. (250kg)

Rear Panels

Panels are bolted to the vertical side frames to enclose the rear of each section and provide lateral stability. Rear panels must be fitted at least every fourth section. Fasteners included. Color: to match unit. Sway braces can be substituted.

PART NO.	HEIGHT
ST Width 28 1/8" (714mm) – 36 units	
RP1000/36U	39 3/8" (1000mm)
RP1450/36U	57 1/8" (1450mm)
RP2000/36U	78 3/4" (2000mm)
RP2200/36U	86 5/8" (2200mm)
RP2500/36U	98 7/16" (2500mm)
RP3000/36U	118 1/8" (3000mm)

HS Width 40 1/8" (1020mm) – 54 units

RP1000/54U	39 3/8" (1000mm)
RP1450/54U	57 1/8" (1450mm)
RP2000/54U	78 3/4" (2000mm)
RP2200/54U	86 5/8" (2200mm)
RP2500/54U	98 7/16" (2500mm)
RP3000/54U	118 1/8" (3000mm)

Sway Braces

Used for units without rear panels to provide the necessary lateral stability. Diagonal braces must be fitted at least every fourth section. Color: to match unit. Supplied in pairs with fasteners included.

PART NO.	WIDTH
SB36U	28 1/8" (714mm)
SB54U	40 1/8" (1020mm)

Shallow Depth Storage Wall® Roll-Out Trays, Shelves and Accessories



Roll-Out Trays

Roll-out trays can be mounted in any sequence or combination with drawers and shelves. Each tray uses the equivalent height of a 100 drawer (100mm high). Trays have full length handles, galvanized insert panels, and 1 3/4" rear and side retaining walls. Be sure to order trays to match the particular section width you are outfitting.

- Usable depth of tray is 18".
- Weight capacity is 440 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
ST-TCF	36U (ST)	24" (610mm)
HS-TCF	54U (HS)	36 1/8" (918mm)



Heavy Duty Roll-Out Trays

Trays have full length handles and galvanized insert panels. Each tray uses the equivalent height of a 225 drawer (225mm high). Be sure to order trays to match the particular section width you are outfitting. Use of individual drawer latch and retainer strip is required (see page 76).

- Usable depth of tray is 18".
- Weight capacity is 770 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
HDTCF/ST	36U (ST)	23" (584mm)
HDTCF/HS	54U (HS)	35 1/8" (892mm)



Adjustable Shelves

Steel shelves can easily be moved at any time and used in any combination or sequence with drawers and roll-out trays. Shelves are 1" (25mm) high. Shelf support clips are included. Color: to match unit. Be sure to order shelves to match the particular section width you are outfitting.

- Usable depth of shelf is 21 3/4".
- Weight capacity is 440 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
AS-P/3627U	36U (ST)	26" (661mm)
AS-P/54U	54U (HS)	38" (967mm)

Shelf Dividers

Steel sheet dividers (shown above) fit over lip of shelf. Color: to match shelves.

PART NO.	HEIGHT
SWSD100/27	4" (100mm)
SWSD150/27	6" (150mm)
SWSD200/27	8" (200mm)

Self-Adhesive Labels

Plastic labels for marking adjustable shelves.

PART NO.	LENGTH
X2785/1	3 7/8" (100mm)
X2785/2	5 7/8" (150mm)
X2785/3	7 7/8" (200mm)
X2785/4	11 3/4" (300mm)



Shelf End Panels

Steel sheet panel provides side wall for shelves. Color: to match unit. Inserted without additional hardware.

PART NO.	HEIGHT	MIN. SHELF SPACING
X612/03	5 15/16" (150mm)	7 7/8" (200mm)
X612/05	7 7/8" (200mm)	9 7/8" (250mm)
X612/07	9 7/8" (250mm)	11 3/4" (300mm)



Frame Top Fill-In Strip

Steel sheet strip, covers top of vertical side frames to create a smooth continuous surface. Not for use with sliding doors or vertical tambour doors. Color: to match unit.

PART NO.
X611



Intermediate Fill-In Strip

Steel sheet strip fills the space created by vertical side frames between shelves or universal panels to create a smooth continuous shelf surface. Must be used between 2 shelves or 2 universal panels. Color: to match unit. Retainer clip included.

PART NO.
X610



Storage Wall® Drawer Locking Systems

For a variety of security needs, Lista offers individual, keyed-alike or master key locking systems for drawer sections. If you wish to lock and secure sections made up of a combination of drawers, roll-out trays and/or shelves, choose from the doors shown on page 78.

How to order a lock system

- Select the appropriate size and type of panels needed to match the Storage Wall section you are building. See the illustrations to the right to find the panels needed for the configuration you have chosen (partial or full height section).
- Select the appropriate lock system based on the configuration you have chosen (partial or full height section). See ordering example on page 71.
- Select lock type.
RG = individual
KA = keyed-alike
MA = master

EXAMPLE: to lock a 2200 height Standard Width (36 unit wide) Storage Wall section containing a 900 height group of drawers below the lock and a 1300 height group of drawers above the lock with an individual lock, you would need to order (1) SWLP3636/1 panel at the bottom, (1) SWLP3636/2 panel at the top and (1) SWLP3636/3 panel at the center, and an SWLK2200-RG lock system.

Panels for Lock System

Same basic construction as universal panels but equipped for installation of lock system. Color: to match unit.

Full Depth Storage Wall System

PART NO.	USABLE WIDTH	LOAD CAP.
Standard Width – 36 units		
SWLP3636/1	26" (661mm)	440 lbs. (200kg)
SWLP3636/2	26" (661mm)	440 lbs. (200kg)
SWLP3636/3	26" (661mm)	440 lbs. (200kg)

Mid-Width – 64 units

SWLP6436/1	44 3/4" (1137mm)	440 lbs. (200kg)
SWLP6436/2	44 3/4" (1137mm)	440 lbs. (200kg)
SWLP6436/3	44 3/4" (1137mm)	440 lbs. (200kg)

Double Width – 78 units

SWLP7836/1	54 1/8" (1375mm)	440 lbs. (200kg)
SWLP7836/2	54 1/8" (1375mm)	440 lbs. (200kg)
SWLP7836/3	54 1/8" (1375mm)	440 lbs. (200kg)

Shallow Depth Storage Wall System

PART NO.	USABLE WIDTH	LOAD CAP.
ST Width – 36 units		
SWLP3627/1	26" (661mm)	440 lbs. (200kg)
SWLP3627/2	26" (661mm)	440 lbs. (200kg)
SWLP3627/3	26" (661mm)	440 lbs. (200kg)

HS Width – 54 units


SWLP5427/1	38" (967mm)	440 lbs. (200kg)
SWLP5427/2	38" (967mm)	440 lbs. (200kg)
SWLP5427/3	38" (967mm)	440 lbs. (200kg)



Lock Systems

For locking a partial height section of drawers. Locks all drawers located below the lock.


Universal Panel



PART NO.	DRAWER SECTION HEIGHT
SWLK300-■	11 3/4" (300mm)
SWLK600-■	23 9/16" (600mm)
SWLK750-■	29 9/16" (750mm)
SWLK900-■	35 7/16" (900mm)
SWLK1050-■	41 5/16" (1050mm)
SWLK1225-■	48 1/4" (1225mm)
SWLK1350-■	53 3/16" (1350mm)
SWLK1525-■	60" (1525mm)

Lock Systems for Full Height Drawer Section

For Storage Wall section that contains only drawers top-to-bottom. Locks all drawers located above and below the lock. **Lower section must be 900 height.**



PART NO.	STOR. WALL TOTAL HEIGHT
SWLK2000-■	74 3/4" (1900mm)
SWLK2200-■	80 3/4" (2050mm)
SWLK2500-■	92 1/2" (2350mm)
SWLK3000-■	112 1/4" (2850mm)

Retainer strip



Individual Drawer Latch (IDL)

Individual drawer latches lock drawers and roll-out trays closed. Particularly suitable for mobile applications or where seismic activity is a consideration. Finger pull latches are recessed and mounted on the right side of the drawer handle. Can be added at any time. **Requires retainer strip (ordered separately – see below).**

PART NO.

IDL

Retainer Strips

Strips bolt to vertical side frame to secure individual drawer latches. **These strips are necessary for IDLs.**

PART NO.

HEIGHT

VP-IDL/1000	39 3/8" (1000mm)
VP-IDL/1450	57 1/8" (1450mm)
VP-IDL/2000	78 3/4" (2000mm)
VP-IDL/2200	86 5/8" (2200mm)
VP-IDL/2500	98 7/16" (2500mm)
VP-IDL/3000	118 1/8" (3000mm)




Lock-In-Lock-Out (LILO)

These safety devices lock drawers in fully opened or fully closed positions. LILO is primarily used in mobile applications or where seismic activity is a consideration.

PART NO.

LILO

Storage Wall® Bookcases, Counter Tops and Ladders

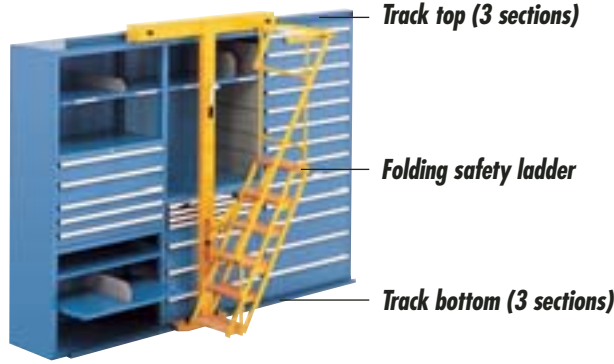

These offerings make your Storage Wall System even more versatile. The bookcase and counter top are available for both full depth and shallow depth Storage Wall Systems.

Bookcases

Overhead bookcase (shown above in Storage Wall section) offers quick access to reference materials and manuals. Bookcase is 12 5/8" deep, with a useable depth of 11 7/8". Color: to match unit.

PART NO.	FOR USE WITH	USE. WIDTH
BC36U	full and shallow depth	25 7/8"
BC54U	shallow depth	37 7/8"
BC64U	full depth	44 1/2"
BC78U*	full and shallow depth	54"

*for (1) 78U or (2) 36U

Butcher Block Counter Tops

Counter style worktop is 1 3/4" thick butcher block hardwood. Mounts on top of universal panel with mounting holes (see pages 72 and 74).

PART NO.	FOR USE WITH
BCT/3627U	shallow depth
BCT/3636U	full depth
BCT/5427U	shallow depth
BCT/6436U	full depth
BCT/7836U	full depth

Track-Guided Folding Safety Ladders

Without sacrificing aisle space, safe, secure and easy access to upper levels is provided by our track-guided folding ladder. Ladder can pivot to right or left so any section is within easy reach. Broad wooden steps, a sturdy handrail, and a hand brake are features engineered for safety. Available in our bright yellow safety color only.

- minimum aisle width to accommodate ladder is 35 1/2"
- not recommended for use with Double Width drawers
- **tracks must be ordered separately (see below)**


PART NO.	MIN. ROOM HEIGHT
LADDER/2000	106 1/4" (2700mm)
LADDER/2200	106 1/4" (2700mm)
LADDER/2500	106 1/4" (2700mm)
LADDER/3000	126" (3200mm)
LADDER/EXT*	

*must be ordered when specifying a Storage Wall ladder in conjunction with sliding doors

Track Tops and Bottoms

Order 1 track length section to match each Storage Wall section (width) you are ordering. Tracks come in pairs, top and bottom. Color: to match unit.

PART NO.	TRACK LENGTH
TRACK/36U	28 1/8" (714mm)
TRACK/54U	40 1/8" (1020mm)
TRACK/64U	46 7/8" (1190mm)
TRACK/78U	56 1/4" (1428mm)



Safety ladder only extends 12 5/8" from Storage Wall when folded flat.





Hinged Door Sets

Protect inventory and equipment from dirt and theft with full-height hinged doors. Economical and easy to install on single or multiple Storage Wall sections. Door sets add 2" to the depth of the Storage Wall section. Requires top and bottom universal panels with mounting holes. Painted to match the unit. To specify lock, please see instructions at the bottom right of this page.

Hinged Door Starters

PART NO.	HEIGHT
Standard and ST Width – 36 units	
DHD2000/36SW-S	78 3/4" (2000mm)
DHD2200/36SW-S	86 5/8" (2200mm)
HS Width – 54 units	
DHD2000/54SW-S	78 3/4" (2000mm)
DHD2200/54SW-S	86 5/8" (2200mm)
Mid-Width – 64 units	
DHD2000/64SW-S	78 3/4" (2000mm)
DHD2200/64SW-S	86 5/8" (2200mm)
Double Width – 78 units	
DHD2000/78SW-S	78 3/4" (2000mm)
DHD2200/78SW-S	86 5/8" (2200mm)

Hinged Door Adders

PART NO.	HEIGHT
Standard and ST Width – 36 units	
DHD2000/36SW-A	78 3/4" (2000mm)
DHD2200/36SW-A	86 5/8" (2200mm)
HS Width – 54 units	
DHD2000/54SW-A	78 3/4" (2000mm)
DHD2200/54SW-A	86 5/8" (2200mm)
Mid-Width – 64 units	
DHD2000/64SW-A	78 3/4" (2000mm)
DHD2200/64SW-A	86 5/8" (2200mm)
Double Width – 78 units	
DHD2000/78SW-A	78 3/4" (2000mm)
DHD2200/78SW-A	86 5/8" (2200mm)



Sliding Door Sets

Doors move smoothly on ball bearings. Doors and track add an additional 5" to the depth and 1/4" to the height of the section. Painted to match the unit. To specify lock, please see instructions at the bottom right of this page. Doors come as pairs, to cover even number of sections, to cover odd numbers of sections, contact your Lista representative.

Sliding Door Starters

PART NO.	HEIGHT
Standard and ST Width – 36 units	
SD2000/36U-S	80 15/16" (2055mm)
SD2200/36U-S	88 13/16" (2255mm)
SD2500/36U-S	100 5/8" (2555mm)
SD3000/36U-S	120 5/16" (3055mm)
HS Width – 54 units	
SD2000/54U-S	80 15/16" (2055mm)
SD2200/54U-S	88 13/16" (2255mm)
SD2500/54U-S	100 5/8" (2555mm)
SD3000/54U-S	120 5/16" (3055mm)
Mid-Width – 64 units	
SD2000/64U-S	80 15/16" (2055mm)
SD2200/64U-S	88 13/16" (2255mm)
SD2500/64U-S	100 5/8" (2555mm)
SD3000/64U-S	120 5/16" (3055mm)
Double Width – 78 units	
SD2000/78U-S	80 15/16" (2055mm)
SD2200/78U-S	88 13/16" (2255mm)
SD2500/78U-S	100 5/8" (2555mm)
SD3000/78U-S	120 5/16" (3055mm)

Sliding Door Adders

PART NO.	HEIGHT
Standard and ST Width – 36 units	
SD2000/36U-A	80 15/16" (2055mm)
SD2200/36U-A	88 13/16" (2255mm)
SD2500/36U-A	100 5/8" (2555mm)
SD3000/36U-A	120 5/16" (3055mm)
HS Width – 54 units	
SD2000/54U-A	80 15/16" (2055mm)
SD2200/54U-A	88 13/16" (2255mm)
SD2500/54U-A	100 5/8" (2555mm)
SD3000/54U-A	120 5/16" (3055mm)
Mid-Width – 64 units	
SD2000/64U-A	80 15/16" (2055mm)
SD2200/64U-A	88 13/16" (2255mm)
SD2500/64U-A	100 5/8" (2555mm)
SD3000/64U-A	120 5/16" (3055mm)
Double Width – 78 units	
SD2000/78U-A	80 15/16" (2055mm)
SD2200/78U-A	88 13/16" (2255mm)
SD2500/78U-A	100 5/8" (2555mm)
SD3000/78U-A	120 5/16" (3055mm)



Vertical Tambour Doors

Individual Storage Wall sections can be locked with vertical tambour door. Vertical door rides effortlessly on tracks mounted to the vertical side frames and retracts into a box mounted on the top of the section. The box adds 12 3/4" to the height of the unit. The additional framing for the slides and lock add 2 3/8" to the depth of the unit. Requires universal panel with mounting holes at top. Box and frame are painted to match the unit but door comes in dove gray only. To specify lock, please see instructions at the bottom right of this page.

PART NO.	TOTAL HEIGHT
Standard and ST Width – 36 units	
VD1450/36U	69 7/8" (1773mm)
VD2000/36U	91 1/2" (2323mm)
VD2200/36U	99 3/8" (2523mm)
VD2500/36U	111 1/8" (2823mm)
HS Width – 54 units	
VD1450/54U	69 7/8" (1773mm)
VD2000/54U	91 1/2" (2323mm)
VD2200/54U	99 3/8" (2523mm)
VD2500/54U	111 1/8" (2823mm)
Mid-Width – 64 units	
VD1450/64U	69 7/8" (1773mm)
VD2000/64U	91 1/2" (2323mm)
VD2200/64U	99 3/8" (2523mm)
VD2500/64U	111 1/8" (2823mm)
Double Width – 78 units	
VD1450/78U	69 7/8" (1773mm)
VD2000/78U	91 1/2" (2323mm)
VD2200/78U	99 3/8" (2523mm)
VD2500/78U	111 1/8" (2823mm)

Tambour Door Section End Panels

Optional panels enclose the ends of the completed unit for a finished appearance (pictured above). Painted to match the unit.

PART NO.	HEIGHT	DEPTH
EP1450/VD	69 7/8"	full
EP2000/VD	91 1/2"	full
EP2200/VD	99 3/8"	full
EP2500/VD	111 1/8"	full
EP1450/VD/B255	69 7/8"	shallow
EP2000/VD/B255	91 1/2"	shallow
EP2200/VD/B255	99 3/8"	shallow
EP2500/VD/B255	111 1/8"	shallow



Full Height Inner Panel

Provides a clean, neat appearance, as well as added security for Storage Wall section enclosed with a door. Steel sheet panel fills entire inner area of a vertical side frame. Installs easily. Order to match height of vertical side frames. Painted to match the unit.

PART NO.	FOR USE WITH
Full Depth – 36 units	
IP1450/36U	1450VSF
IP2000/36U	2000VSF
IP2200/36U	2200VSF
IP2500/36U	2500VSF
IP3000/36U	3000VSF
Shallow Depth – 27 units	
IP1450/27U	1450VSF/B255
IP2000/27U	2000VSF/B255
IP2200/27U	2200VSF/B255
IP2500/27U	2500VSF/B255
IP3000/27U	3000VSF/B255

How to order Storage Wall doors

1. Select door style.
2. ■ Select lock type.
 RG = individual
 KA = keyed-alike
 MA = master

EXAMPLE: to order sliding doors for a Storage Wall section that is 36 units wide and has a 2500 height vertical side frame (100 5/8" high) with an individual lock, the part number for the starter door would be SD2500/36U-S-**RG**, and the part number for the adder door would be SD2500/36U-A-**RG**.

Storage Wall® Wide-Span Beam System



Lista's wide-span beam provides storage for very large items that span more than a single Storage Wall section.

Beams can be placed at 1" increments on the vertical side frame. Beam kits consist of two heavy-duty steel beams and four anchoring clips.

Beam Assembly with Customer-Supplied Deck

Beam assembly kit consists of 2 heavy duty steel beams and 4 anchoring clips (right). Color: to match frames.



PART NO.	USABLE WIDTH	CAPACITY
Full Depth – 27 3/4" deep		
BP2/36U	53 7/8" (1368mm)	1500 lbs.
BP3/36U	82" (2083mm)	1000 lbs.
Shallow Depth – 21 3/4" deep		
BP2/3627U	53 7/8" (1368mm)	1500 lbs.
BP2/5427U	78" (1981mm)	1200 lbs.



Beam Assembly with Metal Deck

Kit consists of 2 steel beams, 4 anchoring clips and metal decking to cover the span indicated in the charts. Galvanized steel panels are 4"-6" wide, and fit snugly together to form a smooth platform. Panels sit inside beams to form a safe, smooth edge and secure fit.

PART NO.	USABLE WIDTH	CAPACITY
Full Depth – 27 3/4" deep		
BM2/36U	53 7/8" (1368mm)	1500 lbs.
BM3/36U	82" (2083mm)	1000 lbs.
Shallow Depth – 21 3/4" deep		
BM2/3627U	53 7/8" (1368mm)	1500 lbs.
BM2/5427U	78" (1981mm)	1200 lbs.



Beam Assembly with Wire Deck

Kit consists of 2 steel beams, 4 anchoring clips and wire mesh decking to cover the span indicated in the charts. Galvanized steel mesh decks come in sizes to fit the widths indicated in the charts. Wire mesh has rounded edges on the front that fit over the beam to provide a safe, smooth edge and secure fit.

PART NO.	USABLE WIDTH	CAPACITY
Full Depth – 27 3/4" deep		
BW2/36U	53 7/8" (1368mm)	1500 lbs.
BW3/36U	82" (2083mm)	1000 lbs.
Shallow Depth – 21 3/4" deep		
BW2/3627U	53 7/8" (1368mm)	1500 lbs.
BW2/5427U	78" (1981mm)	1200 lbs.

Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2 3/32". If end panels are used, add 29/32" for each.

SECTION WIDTH	LENGTH BETWEEN SIDE FRAME CTRS.
2 standard/ST (36 units)	56 1/4" (1428mm)
2 HS (64 units)	80 5/16" (2040mm)
3 standard/ST (36 units)	84 3/8" (2142mm)

Storage Wall® Roller Shelves

Designed to bring additional heavy-duty storage and convenience to Lista's modular Storage Wall System, the Storage Wall Roller Shelf is constructed of standard conveyor rollers, a front security gate and backstop. Ideal for the storage of dies, molds and other heavy equipment and parts, the Roller Shelf is safe, ergonomic, and entirely unique.

The Roller Shelf's innovative design offers both superior flexibility and durability. Available in standard and shallow depths, the Roller Shelf can be easily retrofitted to existing Lista Storage Wall Systems. Roller Shelf levels can be adjusted to maximize storage space and accommodate changing storage needs. Stores one item per roller shelf.




Roller shelves come in two popular widths – 18" and 24"

Hinged security gate retains items on shelf while allowing easy access to contents

Roller levels can be easily adjusted in 1" increments

770 lb. weight capacity

Backstop retains stored items securely on the Roller Shelf

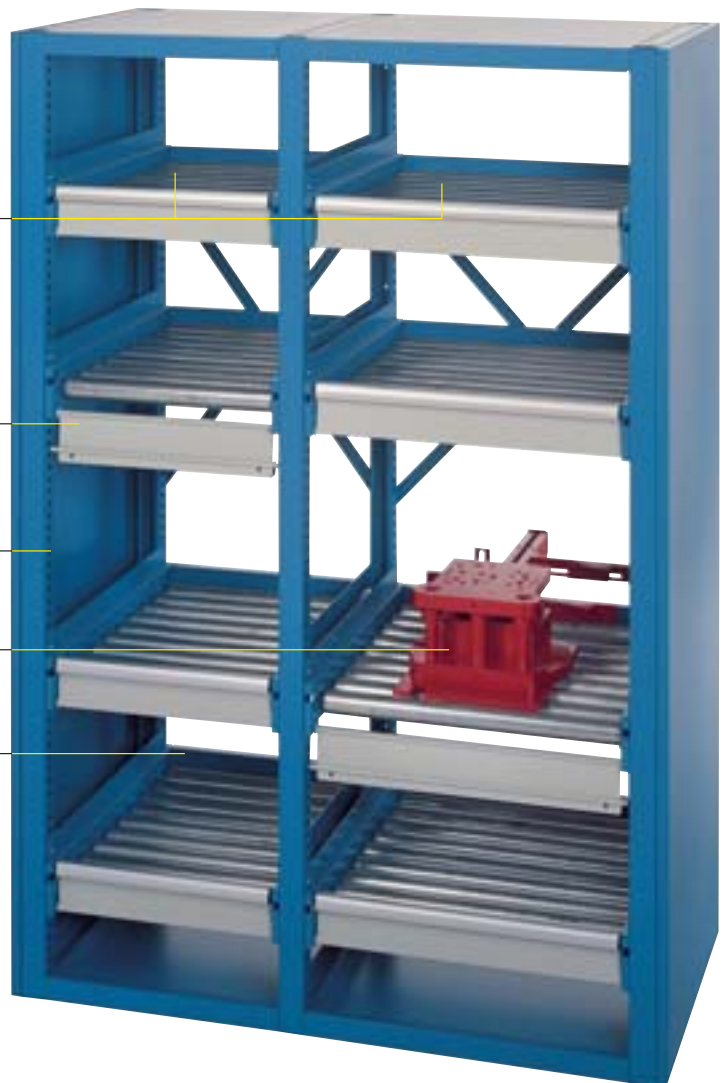

Specifications

Capacity per shelf: 770 lbs. (350 kg)

Rollers per shelf: 27 ³/₄" depth: 9
21 ³/₄" depth: 7

Useable width: 18" shelf: 18 ¹/₂"
24" shelf: 24 ¹/₂"


Maximum Roller Shelves
per Storage Wall section
(78 ³/₄" height): 8

Roller Shelf combinations (see to right)
must be anchored to the floor.

Storage Wall Roller Shelf Easy-Order Combinations


The combinations to the right are configured
to be most useful in a wide variety of
applications.

Select paint color(s) from the Lista colors
shown on the back cover.

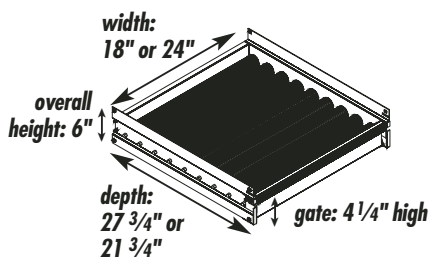


Individual Roller Shelves

PART NO.	WIDTH	USABLE DEPTH
RS-CL/SW	18"	19 ¹ / ₈ "
RS-MP/SW	18"	25 ¹ / ₈ "
RS-ST/SW	24"	19 ¹ / ₈ "
RS-SC/SW	24"	25 ¹ / ₈ "




57 ¹/₈" High Combinations With 3 Shelves

STARTER UNIT PART NO.	ADDER UNIT PART NO.	WIDTH CENTER-TO-CENTER	DEPTH
RS1450/CL-3	RS1450/CL-3A	22 ¹ / ₄ "	21 ³ / ₄ "
RS1450/MP-3	RS1450/MP-3A	22 ¹ / ₄ "	27 ³ / ₄ "
RS1450/ST-3	RS1450/ST-3A	28 ¹ / ₈ "	21 ³ / ₄ "
RS1450/SC-3	RS1450/SC-3A	28 ¹ / ₈ "	27 ³ / ₄ "




57 ¹/₈" High Combinations With 4 Shelves

STARTER UNIT PART NO.	ADDER UNIT PART NO.	WIDTH CENTER-TO-CENTER	DEPTH
RS1450/CL-4	RS1450/CL-4A	22 ¹ / ₄ "	21 ³ / ₄ "
RS1450/MP-4	RS1450/MP-4A	22 ¹ / ₄ "	27 ³ / ₄ "
RS1450/ST-4	RS1450/ST-4A	28 ¹ / ₈ "	21 ³ / ₄ "
RS1450/SC-4	RS1450/SC-4A	28 ¹ / ₈ "	27 ³ / ₄ "



78 ³/₄" High Combinations With 4 Shelves

STARTER UNIT PART NO.	ADDER UNIT PART NO.	WIDTH CENTER-TO-CENTER	DEPTH
RS2000/CL-4	RS2000/CL-4A	22 ¹ / ₄ "	21 ³ / ₄ "
RS2000/MP-4	RS2000/MP-4A	22 ¹ / ₄ "	27 ³ / ₄ "
RS2000/ST-4	RS2000/ST-4A	28 ¹ / ₈ "	21 ³ / ₄ "
RS2000/SC-4	RS2000/SC-4A	28 ¹ / ₈ "	27 ³ / ₄ "



78 ³/₄" High Combinations With 5 Shelves

STARTER UNIT PART NO.	ADDER UNIT PART NO.	WIDTH CENTER-TO-CENTER	DEPTH
RS2000/CL-5	RS2000/CL-5A	22 ¹ / ₄ "	21 ³ / ₄ "
RS2000/MP-5	RS2000/MP-5A	22 ¹ / ₄ "	27 ³ / ₄ "
RS2000/ST-5	RS2000/ST-5A	28 ¹ / ₈ "	21 ³ / ₄ "
RS2000/SC-5	RS2000/SC-5A	28 ¹ / ₈ "	27 ³ / ₄ "